

MONITOR xL ATM

SLIMLINE ATM SECURITY SYSTEM



SLIMLINE PANEL

- Designed to fit the tight space inside an ATM
- Narrow depth - only 4.5cm (1.77")
- Small footprint - only 22 x 29.5cm (8.66" x 11.61")
- Slip-off cover is easily removed in tight spaces

TECHNICAL FEATURES


- 300 users
- Multiple ATM capacity
- 12 inputs expandable to 256
- 2 outputs expandable to 128
- 1,024 events
- 50 schedules
- 30 authorities
- Modem support
- RS485 host port for Director interface (IP, modem, direct)
- 4 EOL custom circuit types
- Simplified full language configuration menus
- Local and remote diagnostics

THREE LCD KEYPADS (OPTIONAL)

- Keypad only (4 inputs, 1 output)
- Keypad with integrated GProxII reader for token arm/disarm (4 inputs, 1 output)
- Keypad with external Wiegand interface (2 inputs, 1 output)



Integration Starts Here!

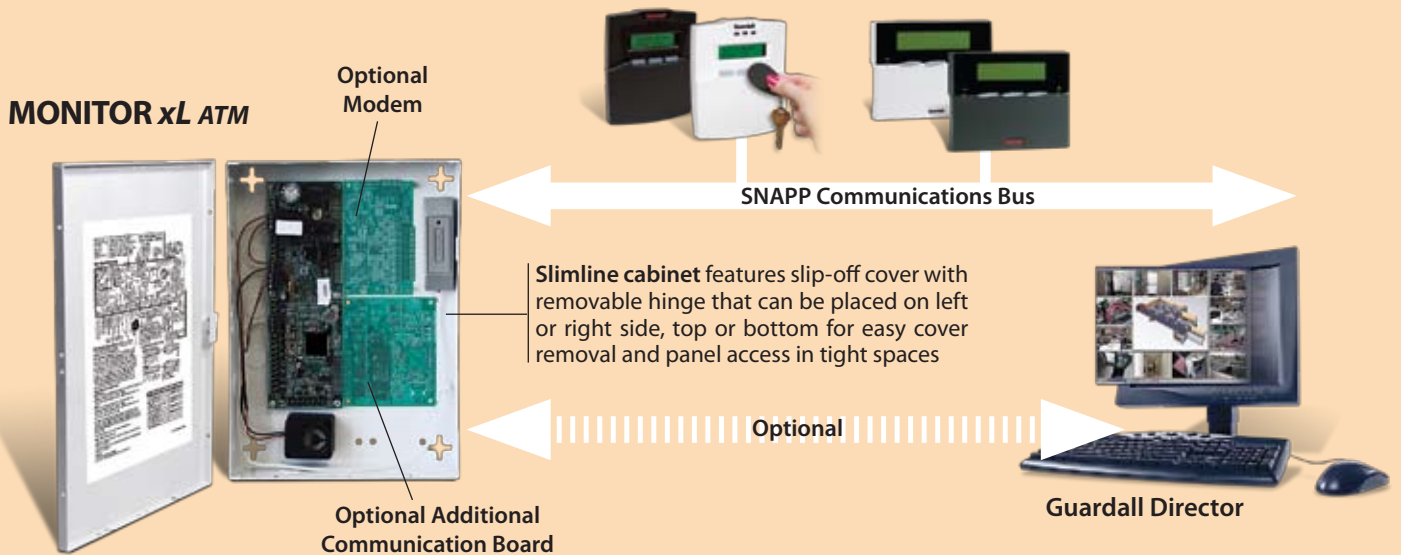

SPECIFICATIONS

Areas	16
Input Points	12 – 256
Output Points	2–128
Users	20 – 300
Modules	24
Authority Levels	30
Schedules	50
Holidays	50
Event Buffer	1024
Video Integration	Optional
Dynamic Mapping	Optional
Photo Badging	Optional
Circuit Supervision	4 custom
Local & Remote Diagnostics EN50131-1 :	
AC Brownout Detection & Status	Yes
Main Panel Voltage & Current	Yes
Battery Charge Current	Yes
Resistance Being Seen at Inputs	Yes
Service Mode	Yes
Operating Voltage	16.5VAC, 37VA or 230VAC
Current Available for Expansion Modules & Optional Accessories	200ma
Operating Temperature	-10°C to 55°C (14°F to 131°F)
Mechanical Dimensions	22 x 29.5 x 4.5 cm (8.66 x 11.61 x 1.77 in)
Weight	7.25 Kg (15.95 lbs) or 7.75 Kg (17 lbs) for 230VAC version
Approvals	FCC Part 15 CISPR 22

EXPANSION MODULES

- **Input/Output Point Expanders**
 - 8 input/10 output w LEDs
 - 8 input/2 output
 - 16 input/16 output w LEDs
 - 16 input/8 output
- **Input/Output Point Expanders with custom circuit supervision**
 - 8 inputs/2 transistor outputs
 - 16 inputs/2 transistor outputs
- **VBUS Expansion**
 - 8 inputs
 - 8 transistor outputs
 - 8 relay outputs
- **Wireless Receivers**
 - 900MHz, 868MHz
- **Optional Communication Modules... that can fit in the Slimline cabinet**
 - Worldwide modem (2400 baud)
 - IP Interface
- **Host PC & Director Software**

Guardall has offices in North America, United Kingdom, France and Italy.
Please go to www.guardall.com for contact information.